

Leaf Lamp Series

Leaf Lamp Tree L Manual

LL303-EN-V01



GREEN
FURNITURE
CONCEPT



Index

Modules	p3
Recycling of parts	p4
Parts Leaf Lamp Tree L	p5-6
Assembly instructions Leaf Lamp Tree L	p7-9



Leaf Lamp Tree L

Leaf Lamp Series

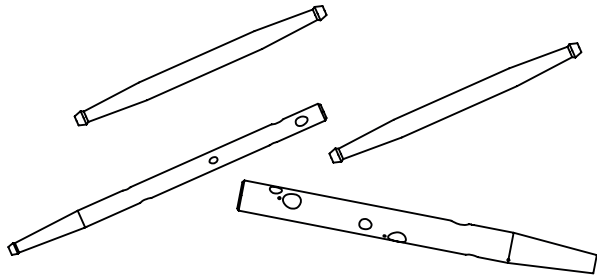
Leaf Lamp Tree L

Cord: 230 V white textile cord Cord length: 7 m Trunk: around Ø150 mm will vary at different heights of the trunk. The cord is either guided to an electrical outlet in the ceiling, or on the inside of the trunk to an electrical outlet in the ground. This Leaf Lamp Tree comes with a little birdhouse attached to the trunk at assembly and hides all electrical components inside.




Recycling – Parts

Leaf Lamp Series




Wood parts

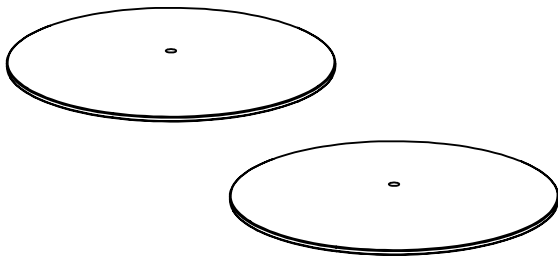Wooden parts such as the dowels should be separated and recycled as wood.



Textile parts

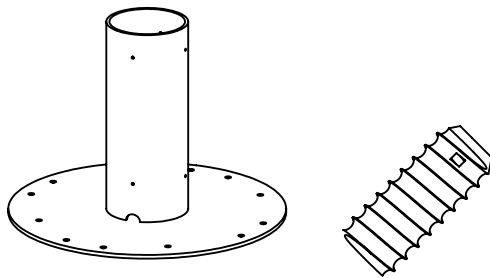All felt leaves should be removed and recycled as textile waste.



Steel parts

All metal parts such as the foot and small parts should be recycled as steel.



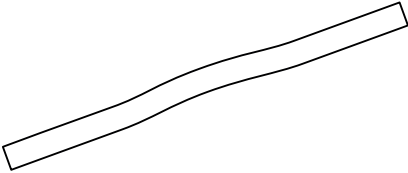
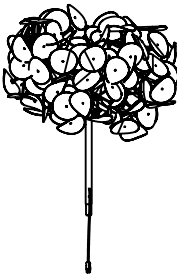
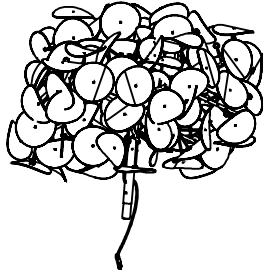



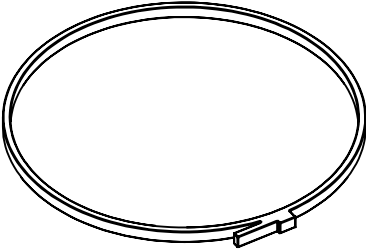

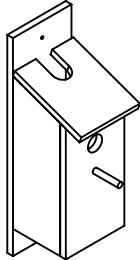



Electrical components

All electrical components such as cables, chargers and sockets should be separated and recycled as electronic waste.



Parts – Leaf Lamp Tree L




Leaf Lamp Series

 <p>LL Trunk M LL0010 x1</p>	 <p>Cluster L 700 x1</p>	 <p>Cluster L 500 x5</p>
 <p>Roundhead wooden screw 4,5x70 SP063 x6</p>	 <p>Countersunk Taptite Bolt Torx M5x8 SP003 x1</p>	 <p>Cord Relief SP090 x1</p>
 <p>Cable Tie L400 SP075 x1</p>	 <p>Roundhead Wooden Screw 4,5x40 (torx) SP068 x2</p>	 <p>Birdhouse LL0019 x1</p>
 <p>Fastener Set Screw 6x20 SP061 x8</p>	 <p>Grommet 11,1x6,4x9,5 SP095 x1</p>	 <p>Roundhead wooden screw 3x16 SP042 x31</p>



Parts – Leaf Lamp Tree L

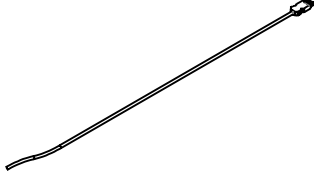Leaf Lamp Series

 <p>Distributor EC008 x2</p>	 <p>Cabel 7000 EC013D x1</p>	 <p>Cable assembly EC002 x1</p>
---	---	--

Assembly Instructions – Leaf Lamp Tree L

Leaf Lamp Series

1

NOTE: If your product is connected to a Baseplate Extension, start with reading separate manual for the Baseplate Extension.

stext
xxxxxxx

2

Attach the cord relief and the cable tie in the bottom of the lower trunk using the countersunk taptite bolt. **NOTE:** Attache the cord relief in the top if the power source is in the celing.

3

Pull the cable through the trunk if the power source is in the floor. For power source in the celing, pull the cable straight up from the birdhouse.

4

Place the trunk in the foot.

5

Grommet

Pull the cable out to the side of the foot. Make sure the grommet is in place, protecting the cable around the exit.

6

Fastener Set Screw 6x20

Use the set screws to attach and align the trunk in the foot.

Assembly Instructions – Leaf Lamp Tree L

Leaf Lamp Series

7

Roundhead wooden screw 4,5x40

Use the 4,5x40 wooden screw to attach the birdhouse to the top of the trunk.

8

NOTE: All clusters comes with two unmounted branches.

9

Attach the last two branches by pushing them in to the remaining holes of the larger dowel. Turnt the branches until they fit in the cluster. Repeat on all four large clusters for the tree.

10

Connect all clusters to the trunk.

11

Secure all the clusters using the Roundhead wooden screw 3x16.

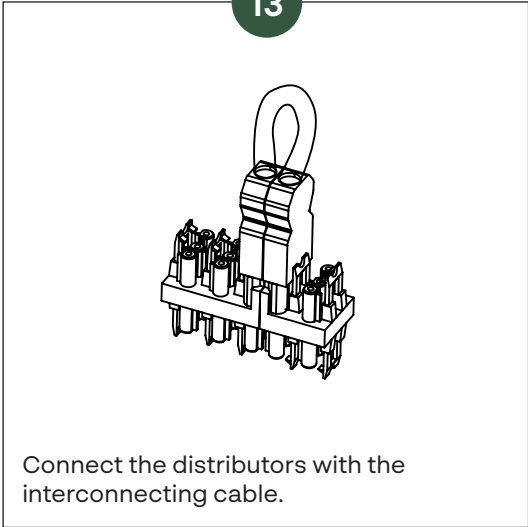
12

Connect all the cables from the clusters to the distributor in the birdhouse.


Assembly Instructions – Leaf Lamp Tree L

Leaf Lamp Series

13



14

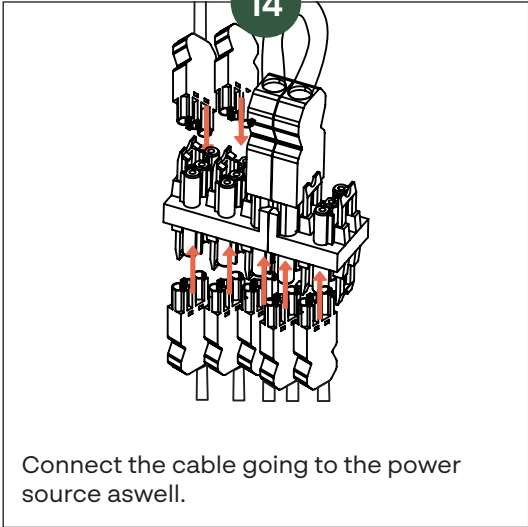

15

